



Contacts 5 Documentation for Bluetooth/IR Dialing

by PDA Performance (<http://www.pdapformance.com>)


Contacts 5™ Documentation Information

This Contacts 5™ documentation assumes the reader already understands the basic fundamentals of using the built-in Palm OS Address Book and the Palm Operating System. **This documentation is copyrighted by PDA Performance and shall not be distributed without consent from PDA Performance. You must agree to the Contacts 5™ License Agreement before using Contacts 5™ or the Contacts 5™ documentation.**


Setting Up Bluetooth/IR Dialing

The screenshots and information provided below were written assuming the user is setting up Bluetooth/IR dialing on a Palm Tungsten/Zire 71 series device. Do keep in mind that while the screenshots were taken on a Palm Tungsten series device, this tutorial can be also be followed on Sony CLIE handhelds with Palm OS 5.


NOTICE: Contacts 5 is currently *NOT* compatible with the Bluetooth memory stick. At this time, Contacts 5 does not support dialing via a Bluetooth memory stick module.

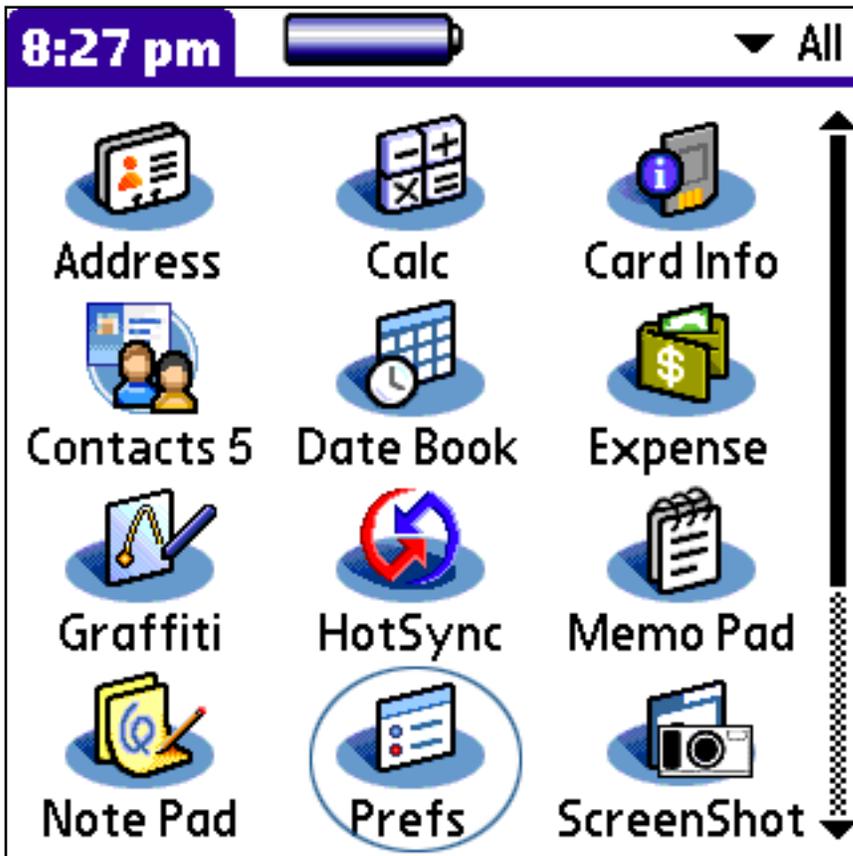

1) Tap the *Prefs* icon in the Palm OS launcher to modify the system preferences.

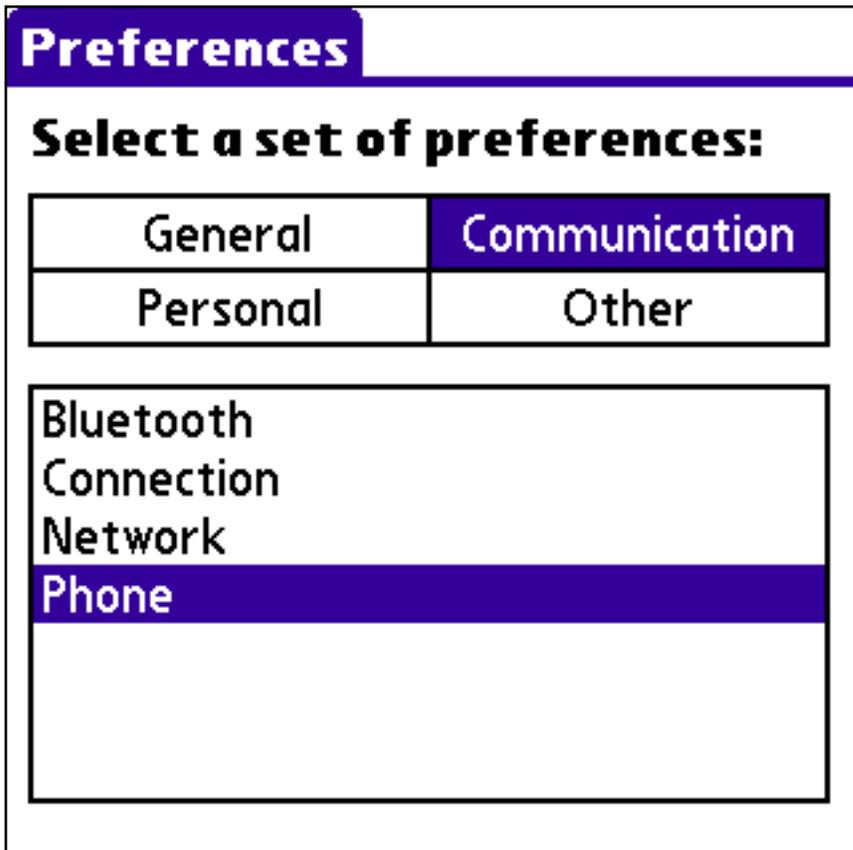

2) Tap the *Communication* category and then tap *Phone* (displayed in the list).

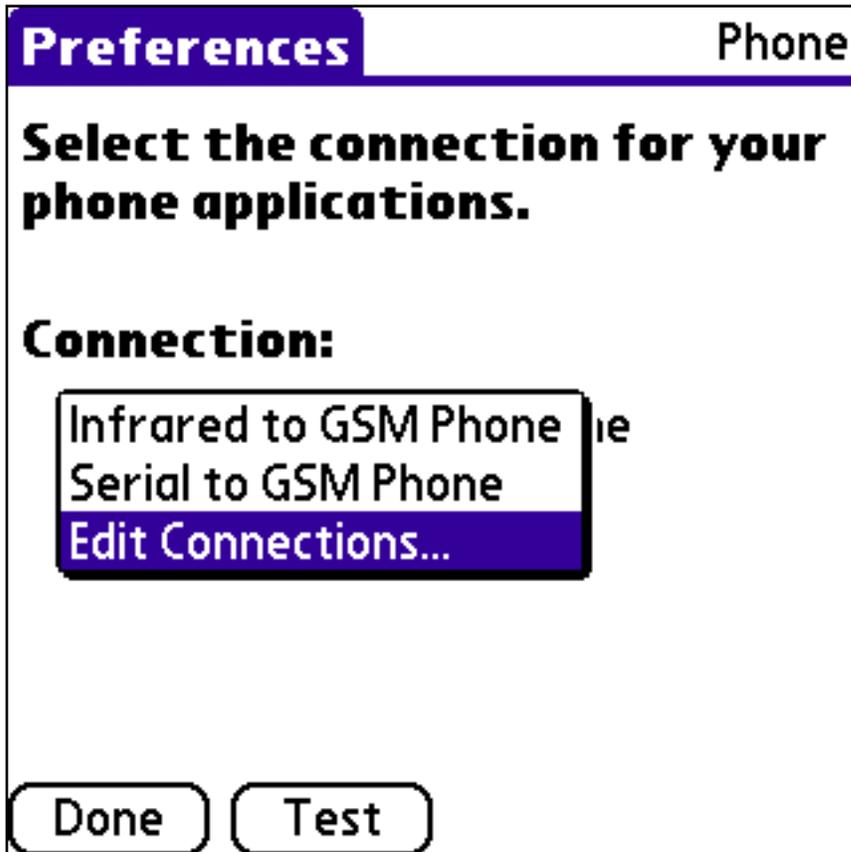

3) Tap the *Connection* trigger to pop-up the list of available connections. From the list, tap *Edit Connections...*

- If you are connecting via Bluetooth...

Preferences Connection**Available Connections:**

Palm Modem US/Canada

Palm Modem UK

IBM WorkPad Modem

Cradle/Cable

IR to a PC/Handheld

Infrared to GSM Phone

Serial to GSM Phone

Done

New...

Edit...

Delete

4) If you do not already have a connection to connect to your GSM Phone via Bluetooth, tap *New...* to create a new connection.



Edit Connection ⓘ

Name: BT to GSM Phone

Connect to: ▼ Phone

Via: ▼ Bluetooth

Device: Tap to Find

Model: ▼ Standard GSM

OK Cancel Details...

5) Enter a name for the new connection. The following settings should be selected:

Connect to: *Phone*

Via: *Bluetooth*


Device: *****Tap the button to find the phone you wish to dial to*****

Model: *Standard GSM* *****If another driver is required, select it instead of Standard GSM*****


* If you need to enter any other information so your Palm OS device can communicate with your phone, tap *Details...* and enter the

required information.

6) Tap *OK* to save the new connection.

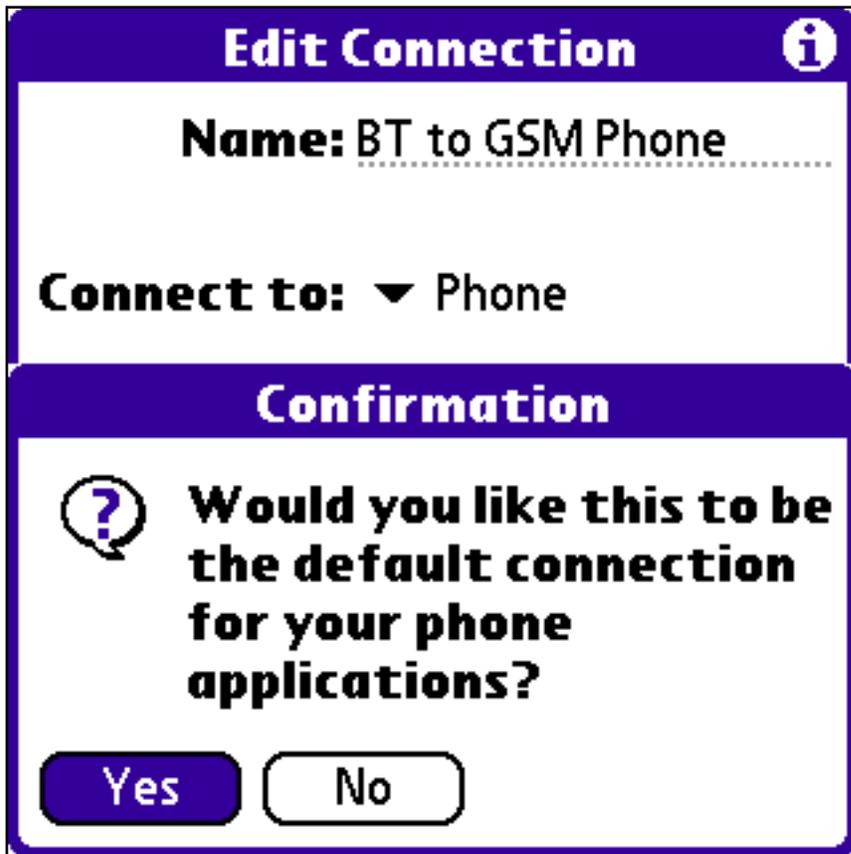

7) If you are prompted to make this connection the default phone connection, tap *Yes*.

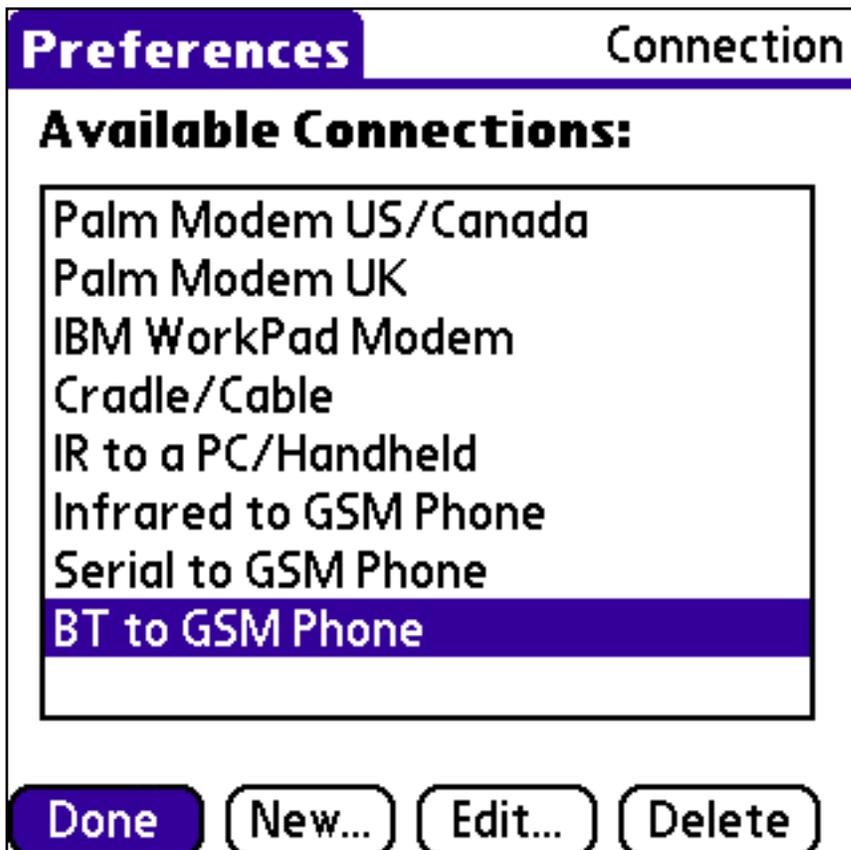

8) Make sure the new connection is selected in the *Available Connections* list and then tap *Done*.

Preferences Phone

Select the connection for your phone applications.

Connection:

- Infrared to GSM Phone
- Serial to GSM Phone
- BT to GSM Phone**
- Edit Connections...

Done


Test

9) Make sure the new connection is selected and then tap *Done*.



10) Now, tap the *home* [] icon to return to the launcher.

11) From the launcher, tap the Contacts 5 icon to open Contacts 5™.

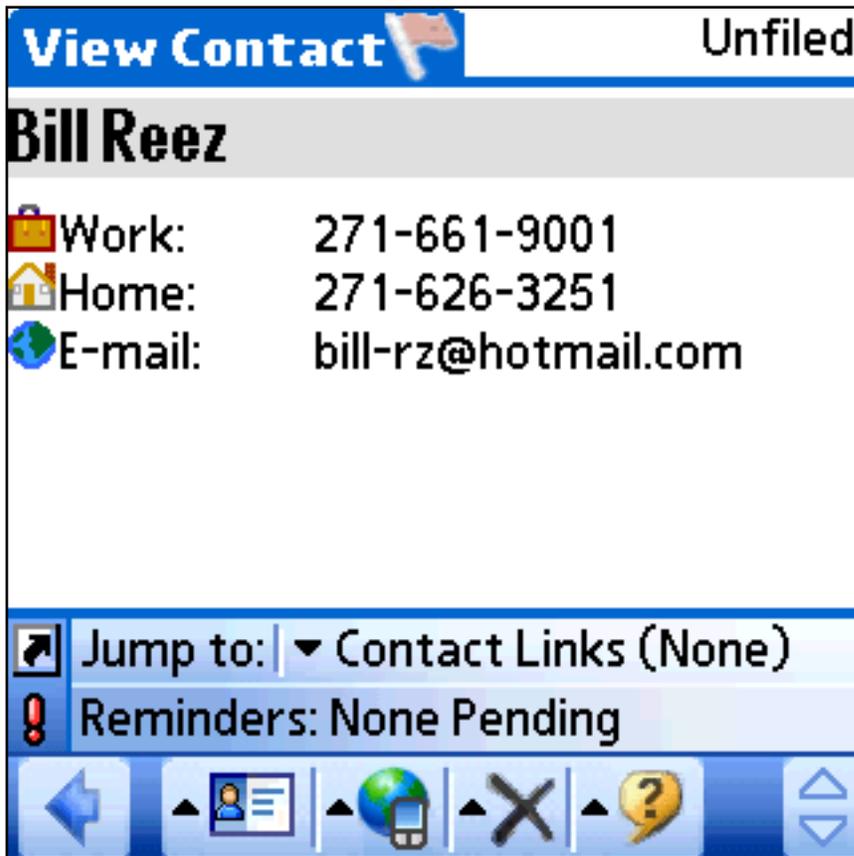

12) When a record is selected in Contacts 5™ (or displayed in this example), tap the *Dial* option.



13) The *Dial Phone Number* screen is displayed.

Select a phone number from the list which you would like to dial.

*Make sure the dialing device is set to *Palm OS Dialer*. You can modify the dialing device by tapping the *Dial Using...* button.

14) Tap *Dial* to dial the phone number.



15) The selected phone number will now be dialed using your GSM Phone (via Bluetooth).

About Contacts 5 and this documentation

The Contacts 5 code and this Contacts 5 documentation were written entirely by [Parker Minardo](#) and is copyrighted by PDA Performance, Inc. SmartContacts™, SmartContacts Version 5™ and RapidEdit™ are trademarks of PDA Performance. Copyright 2002-2004 PDA Performance, Inc. All rights reserved.